


# Aumühle, Bismarck-Gedächtnis-Kirche

Bismarck-Gedächtnis-Kirche, Börnsener Straße 25, 21521 Aumühle, Germany

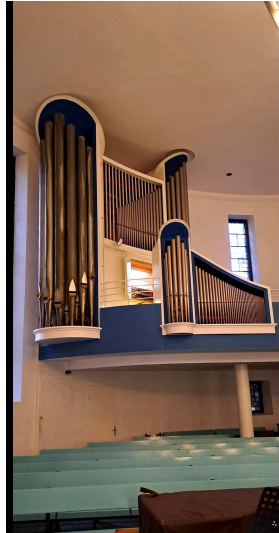

<b>Builder</b>	R. v. Beckerath
<b>Year</b>	ca. 1962
<b>Period/Style</b>	Neo-Baroque
<b>Stops</b>	33
<b>Keyboards</b>	3+P
<b>Keyaction</b>	tracker/mechanical
<b>Tuning</b>	Equal at 440.0 Hz

## Description

The first organ was installed in the church in 1930. However, due to deficiencies, mold, and corrosion on the pipes, a new organ was built by Rudolf von Beckerath in 1962. In 1978, a third manual (swell box) was added behind the organ. In 2015, the organ was cleaned and the swell box was expanded by one register.

## Stoplist/Disposition

I Rückpositiv	II Hauptwerk	III Schwellwerk	Pedal
Gedackt 8'	Quintadena 16'	Bordun 16'	Untersatz 16'
Prinzipal 4'	Prinzipal 8'	Gemshorn 8'	Offenbass 8'
Blockflöte 4'	Rohrflöte 8'	Hohlflöte 8'	Metallflöte 4'
Oktave 2'	Oktave 4'	Prinzipal 4'	Nachthorn 2'
Sesquialtera 2fach 22/3' + 13/5'	Spielflöte 4'	Quinte 22/3'	Rauschpfeife 4fach 22/3'
Spitzquinte 1 1/3'	Nassat 2 2/3'	Waldflöte 2'	Fagott 16'
Scharff 4fach 1'	Flachflöte 2'	Terz 13/5'	
Krummhorn 8'	Mixtur 4-6fach 11/3'	Mixtur 4-5fach 2'	
	Trompete 8'	Oboe 8'	
		Schalmei 4'	

**Additional:** I/II, III/II, I/P, II/P, III/P, Tremulant für I, Tremulant für III, Schweller für III, Tremulant I Rückpositiv, Tremulant III Schwellwerk

## Sources

[https://organindex.de/index.php?title=Aum%C3%BChle,\\_Bismarck-Ged%C3%A4chtnis-Kirche](https://organindex.de/index.php?title=Aum%C3%BChle,_Bismarck-Ged%C3%A4chtnis-Kirche)