


Ermelo, Immanuëlkerk

Stationsstraat 137, 3851 Ermelo, Netherlands

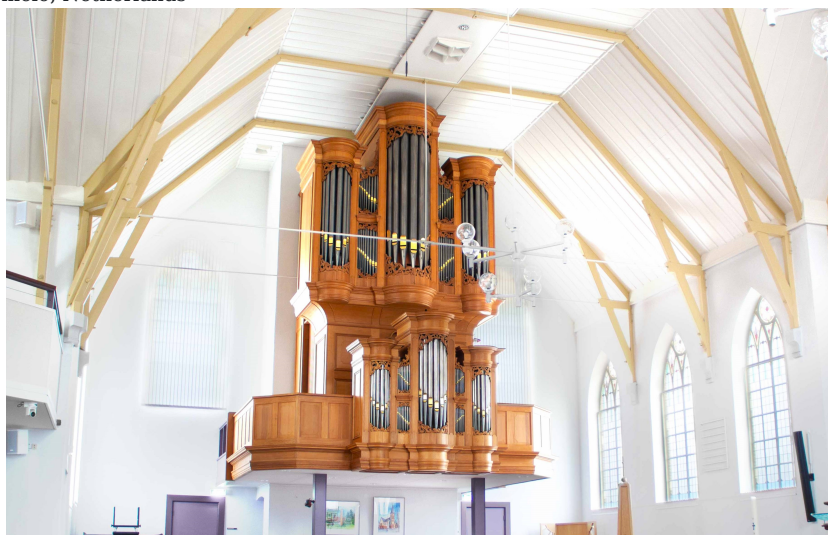

Builder	Reil
Year	1981
Period/Style	Baroque
Stops	24
Keyboards	2+P
Keyaction	tracker/mechanical
Sampleset	<u>Piotr Grabowski</u>

Description

Ermelo is a town located in the province Gelderland in The Netherlands. The Emmanuel Church (Immanuelkerk) was built in 1899 and later expanded with a tower in 1921-1922. It hosts a magnificent organ, built by famous Dutch organbuilder Reil in 1981. Its conception was heavily based on the organ of the Hervormde Kerk in Tzum, which was built by 1763-1764 by Albertus Anthoni Hinsz.

The stoplist of the organ of Ermelo is almost the same as its Tzum counterpart, with the exception of the pedal division. The original organ pedal keyboard has no stops, so it only couples manuals. In Ermelo, the pedal division was created with 5 stops assigned to it. Klaas Bolt, a well-known Dutch organist, was the advisor for the organ building project.

Stoplist/Disposition

Hoofdwerk	Rugwerk	Pedaal
Bourdon 16 voet	Holpijp 8 voet	Subbas 16 voet
Praestant 8 voet	Praestant 4 voet	Octaaf 8 voet
Baarpijp 8 voet	Roerfluit 4 voet	Gedekt 8 voet
Quintadena 8 voet	Octaaf 2 voet	Bazuin 16 voet
Octaaf 4 voet	Gemshoorn 2 voet	Trompet 8 voet
Fluit 4 voet	Sesquialter II sterk	
Quint 3 voet	Dulciaan 8 voet	
Octaaf 2 voet		
Cornet III sterk		
Mixtuur III-IV sterk bas/discant		
Trompet 8 voet bas/discant		
Vox Humana 8 voet bas/discant		

Additional: Manual koppel, Pedal koppel, Tremulant

Sources

<https://piotrgrabowski.pl/ermelo/>